



REVISIONS		
ISS	ZONE	DESCRIPTION\APPROVED\DATE



RECOMMENDED  
CABLE STRIPPING DIM'S

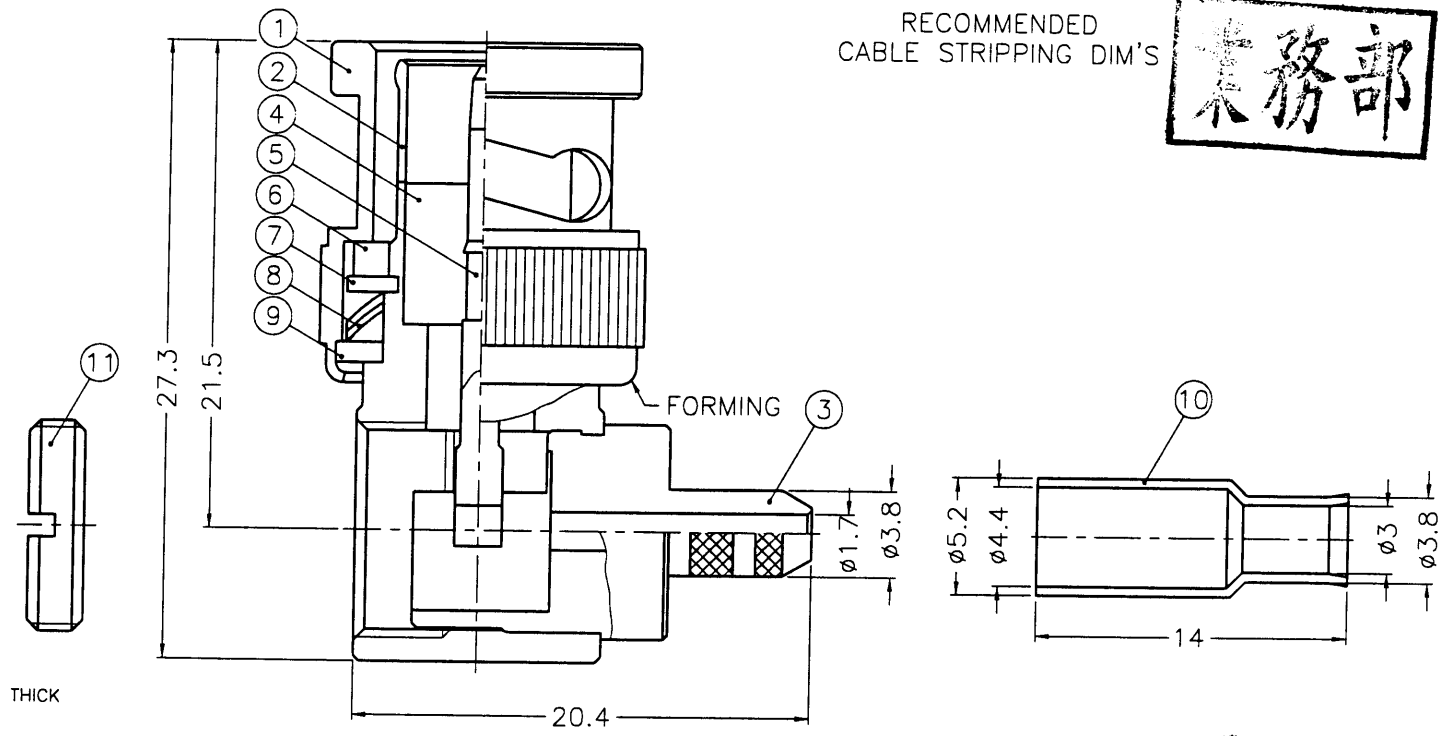

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)  
 1. BRASS PER QQ-B-626  
 2. BRASS PER QQ-B-613  
 3. NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 4. NICKEL PL. 200 MIN. THICK OVER COPPER STRIKE  
 5. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE  
 6. JIS H 3260, C 3501

11	NUT	NOTE 1	NOTE 3	1	B5291-14
10	FERRULE	NOTE 6	NOTE 3	1	FR-52/44-38/3 X14
9	WASHER	NOTE 2	NOTE 3	1	WS-128/9X08
8	SPRING	SK5	NOTE 4	2	B50000-6
7	RETAINER RING	NOTE 1	NOTE 3	1	B50000-5
6	GASKET	RUBBER	RED	1	GS-115/8X15
5	CONTACT PIN	NOTE 1	NOTE 5	1	B5091-6-75-B
4	INSULATOR	DELTRIN	NATURAL	1	B5091-5-75
3	BARREL	NOTE 1	NOTE 3	1	B5091-3-38/17
2	HOUSING	NOTE 1	NOTE 3	1	B5091-2
1	SHELL	NOTE 1	NOTE 3	1	B50000-1-B

DIMENSIONS ARE IN. MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED <i>Mark C</i> DATE 09-22-98'	
0.5-6 = ±0.2		CHECKED <i>Mark C</i> DATE 09-22-98'	
6-30 = ±0.4		DRAWN <i>Betty S</i> DATE 09-22-98'	
30-120 = ±0.6			
120-315 = ±1			
315-1000 = ±1.6			
1000-2000 = ±2.4			
SCALE	3/1	ISSUE	A

**KAI JACK INDUSTRIAL CO., LTD.**  
TAINAN TAIWAN R.O.C.

TITLE: BNC R/A CRIMP PLUG

DRAWING NO.: KJ-B1112E1-ND3G-179U-75

FILE NO.: F:\DWG\B\1112E1\179U-75\ND3G



82-2493